

**Islands District Council**  
**IsDC Paper No. 10/2026**  
**Progress Report of Major Projects in Islands District**



**Civil Engineering and Development Department**  
**South Development and Sustainable Lantau Office**  
**March 2026**

# Progress Report of Major Projects in Islands District ( as at 31 December 2025 )

<u>Contents</u>	<u>Page</u>
(1) Objectives	2
(2) Community Facilities Works	3
(3) Port and Reclamation Works	11
(4) Roads Works	14
(5) Drainage Works	15
(6) Water Works	23
(7) Others	24
(8) Appendix – Location Plan of some major works in Islands District	

## (1) Objectives

- (i) This report contains project information provided by relevant government departments up to 31 December 2025, unless otherwise specified.
- (ii) Projects include
  - Items completed between 1 January 2025 and 31 December 2025;
  - Items in progress; and
  - Items expected to commence in/after 2026

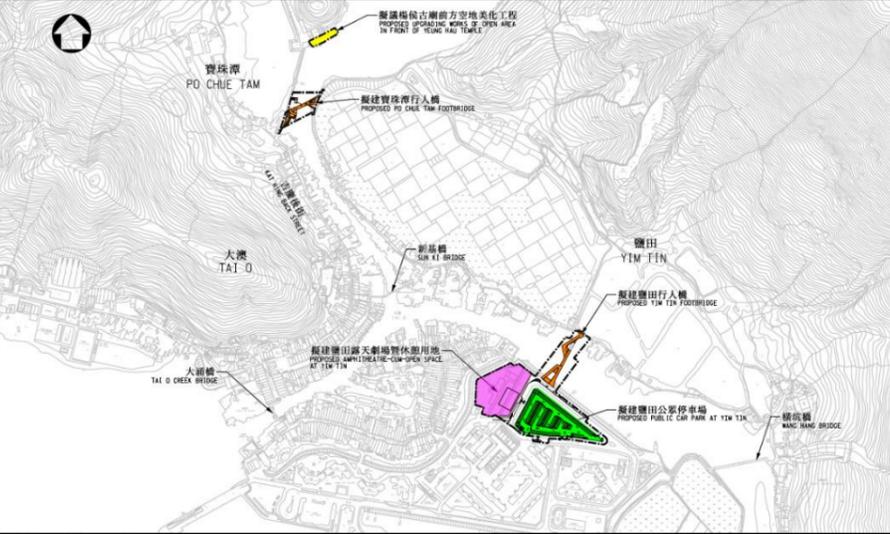
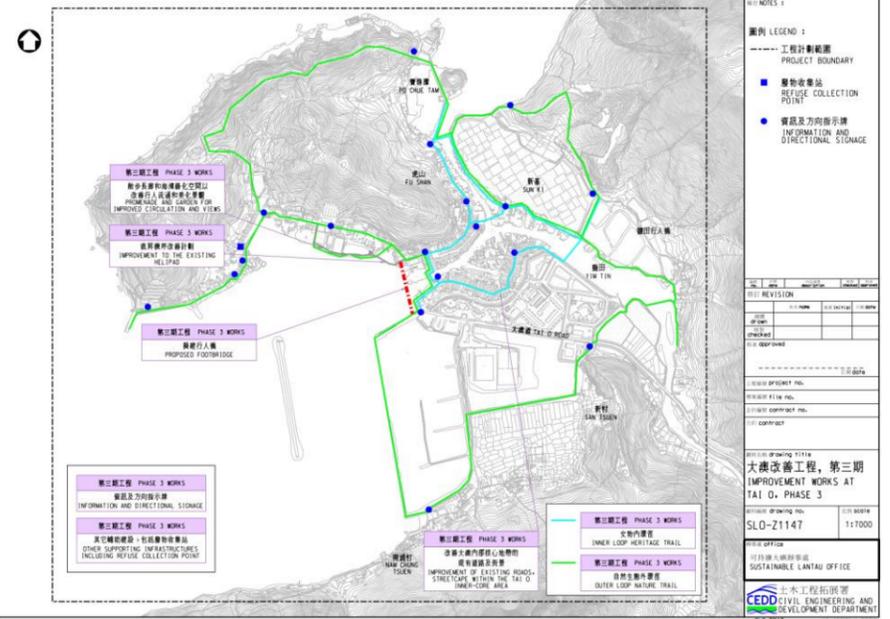
ArchSD: Architectural Services Department  
CEDD: Civil Engineering and Development Department  
DSD: Drainage Services Department  
EDB: Education Bureau  
HyD: Highways Department

SDEV: Secretary for Development  
SEE: Secretary for Environment and Ecology  
STL: Secretary for Transport and Logistics  
WSD: Water Supplies Department

(2) Community Facilities Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
7482RO A	Improvement works at Mui Wo –phase 2 stage 2	897.6	SDEV CEDD	05/2023	3/2028 (Tentative)	<p>This project includes the reprovisioning of cooked food market, reprovisioning of public toilets, dry goods stalls, and refuse collection point, reprovisioning of cargo loading and unloading area at the ex-concrete batching plant site, improvement to south waterfront promenade, construction of podium garden by adopting the concept of “single site, multiple uses”, reprovisioning of covered cycle parking area (providing about 1900 cycle parking spaces) and car park (providing about 90 parking spaces for private car), improvement of Entrance Plaza, and reprovisioning of public transport interchange.</p> <p>The project commenced in May 2023 and will be completed by phases from 2026 to 2028.</p>	

(2) Community Facilities Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
417RO A (Phase 2 Stage 2) C (Phase 3)	Improvement works at Tai O (Phase 2 Stage 2 and Phase 3 works)	310.4 (Phase 2 Stage 2)  Under Review (Phase 3)	SDEV  CEDD	3/2023 (Phase 2 Stage 2)  Under Review (Phase 3)	4/2026 (Tentative) (Phase 2 Stage 2)  Under Review (Phase 3)	Improvement works at Tai O, Phase 2 Stage 2 mainly cover two proposed footbridges for improving local connectivity. The construction works of Phase 2 Stage 2 commenced in March 2023 and are anticipated to be completed in three years. Improvement Works at Tai O, Phase 3 works mainly cover works for improving facilities to help preserve the heritage and facilitate visitors' appreciation of natural attributes of Tai O. The detailed design is in progress.	 <p>大澳改善工程第二期第二階段 — 位置圖 IMPROVEMENT WORKS AT TAI O, PHASE 2 STAGE 2 - LOCATION PLAN</p> <p>Improvement Works at Tai O, Phase 2 Stage 2</p>  <p>Improvement Works at Tai O, Phase 3</p>

(2) Community Facilities Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
402IO A	Provision of facilities and accommodation for various government departments to support the Three-Runway System at the Hong Kong International Airport	2,624.5	STL ArchSD	6/2021	12/2026	<p>The scope of works comprises –</p> <p>(a) fitting out works for the government premises/facilities located inside the Airport Authority Hong Kong (AAHK)'s buildings including the Third Runway Passenger Building, the expanded Terminal 2 (T2), gate houses and plant buildings at the Eastern Support Area (ESA) and the Western Support Area (WSA), aircraft recovery equipment store at WSA and the new Integrated Airport Centre on the existing Airport Island.</p> <p>(b) construction of Customs Dog Base at ESA, vehicle control kiosks and vehicle search bays with canopies at ESA and WSA to be administered by Customs and Excise Department (C&amp;ED); and Hong Kong Police Force (HKPF)'s minor works in the airfield;</p> <p>(c) construction of underground cable duct systems linking the new premises/facilities of C&amp;ED, Immigration Department (ImmD) and HKPF with their existing premises/facilities at the Airport Island;</p> <p>(d) integration of C&amp;ED's inspection facilities with AAHK's Baggage Handling System; and</p> <p>(e) refurbishment works at part of the existing premises/facilities of C&amp;ED and ImmD located inside Terminal 1 for connecting with their respective systems under the Three-Runway System development.</p>	<p>402IO 香港國際機場三跑道系統的相關政府部門設施及辦公地方 PROVISION OF FACILITIES AND ACCOMMODATION FOR VARIOUS GOVERNMENT DEPARTMENTS TO SUPPORT THE THREE-RUNWAY SYSTEM AT HONG KONG INTERNATIONAL AIRPORT</p> <p>ARCHITECTURAL SERVICES DEPARTMENT 建築署</p>

(2) Community Facilities Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
278LP A	Provision of police facilities to support the Three-Runway System at the Hong Kong International Airport	1,866.6	STL ArchSD AAHK	6/2021	2026 Q1	<p>The scope of works comprises the construction of the following police facilities to support the Three-Runway System at Hong Kong International Airport:</p> <p>(a) construction of a new Airport District Operational Base at the Eastern Support Area; and</p> <p>(b) internal alteration works to the facilities of the existing Airport Police Station.</p>	<p>The top drawing is a 'LOCATION PLAN' showing the overall layout of the Hong Kong International Airport with various buildings and runways. A red dashed line indicates the location of the new Airport District Operational Base at the Eastern Support Area. The bottom drawing is a 'SITE PLAN FOR NEW AIRPORT DISTRICT OPERATIONAL BASE AT EASTERN SUPPORT AREA', showing a detailed view of the base with green areas for outdoor training facilities and various building footprints. Both drawings include legends, titles, and the Architectural Services Department logo.</p>

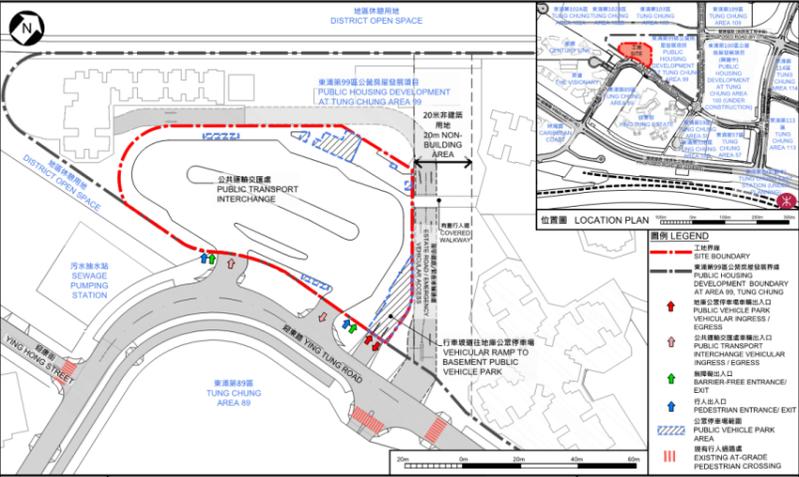
(2) Community Facilities Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
176BF A	Provision of Fire Services Facilities to support the Three-Runway System at the Hong Kong International Airport	2,605.8	STL ArchSD FSD AAHK	6/2019	8/2025	<p>The scope of works comprises the construction of following fire services facilities to support the Three-Runway System (3RS) at the Hong Kong International Airport (HKIA) –</p> <p>(a) facilities in the Western Support Area (WSA) –</p> <ul style="list-style-type: none"> <li>(i) an airside fire station with a 9-bay appliance room;</li> <li>(ii) a speed boat launching facility; and</li> <li>(iii) a decontamination facility;</li> </ul> <p>(b) facilities in Eastern Support Area (ESA)–</p> <ul style="list-style-type: none"> <li>(i) an airside fire station with a 9-bay appliance room; and</li> <li>(ii) a landside fire station-cum-ambulance depot with a 7-bay appliance room; and</li> </ul> <p>(c) an underground cable duct system linking the above facilities with the existing fire services facilities and the new and existing Air Traffic Control towers.</p>	

**(2) Community Facilities Works**

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
196SC A	Community Hall-cum-Home Affairs Enquiry Centre in Cheung Chau	156.6	SHA ArchSD	5/2021	4/2025	The project scope is to construct a Community Hall and Home Affairs Enquiry Centre at Sai Tai Road in Cheung Chau.	 <p data-bbox="2056 835 2867 905">Perspective View of the Community Hall-cum-Home Affairs Enquiry Centre</p>
008NR D	Construction of Refuse Collection Point at Area 57B, Tung Chung New Town Extension	42.69	SEE FEHD ArchSD	2026 Q2	2028 Q2	Construction of a permanent off-street RCP at Area 57B, Tung Chung New Town Extension.	

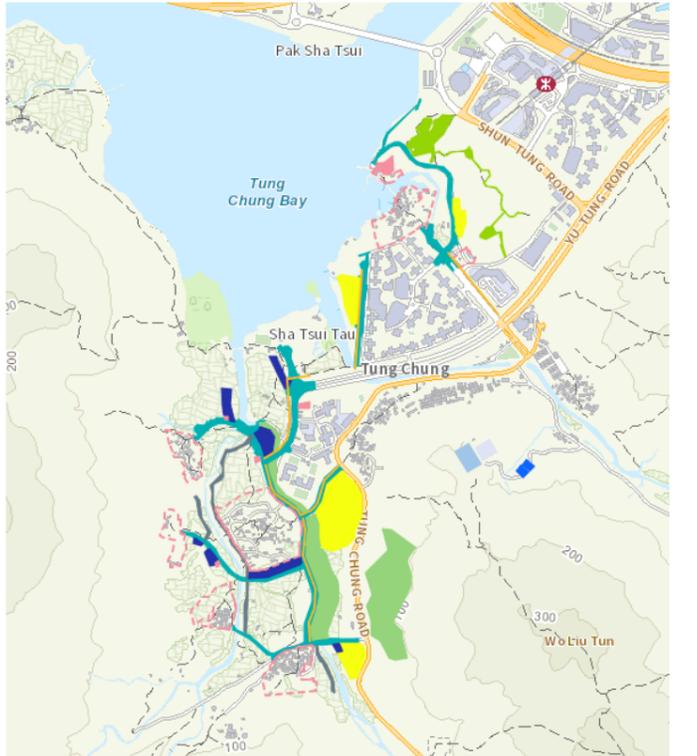
(2) Community Facilities Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
24TP A	Public Vehicle Park at Area 99, Tung Chung	167.5	STL TD ArchSD HD	2/2022	2026 Q1	<p>The scope of works comprises the construction of -</p> <p>(a) a one-level underground public vehicle park providing about 80 public parking spaces for private cars; and</p> <p>(b) ancillary facilities, including a shroff office, plant rooms, etc.</p>	 <p>工地平面圖 SITE PLAN</p> <p>24TP 東涌第99區的公眾停車場 PUBLIC VEHICLE PARK AT AREA 99, TUNG CHUNG</p> <p>ARCHITECTURAL SERVICES DEPARTMENT 建築署</p>
372EP A	A 30-classroom primary school at Area 89 (Northern side), Tung Chung	647.0	Secretary for Education ArchSD	6/2025	2028 Q4	Construction of a 30-classroom Primary School at Area 89 (Northern side), Tung Chung.	 <p>Perspective View of the Primary School from South Direction</p>

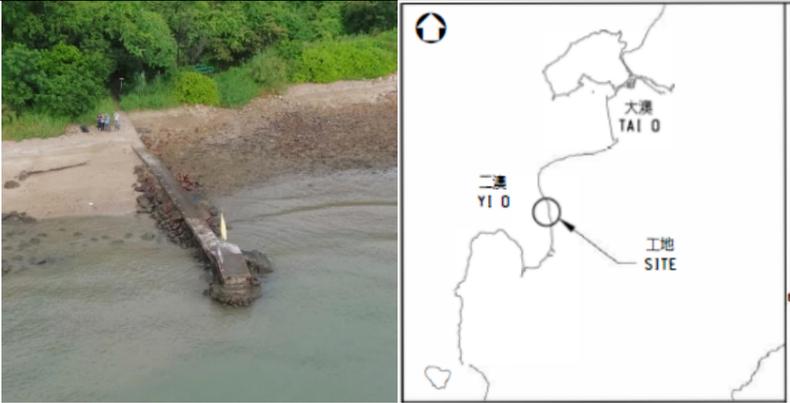
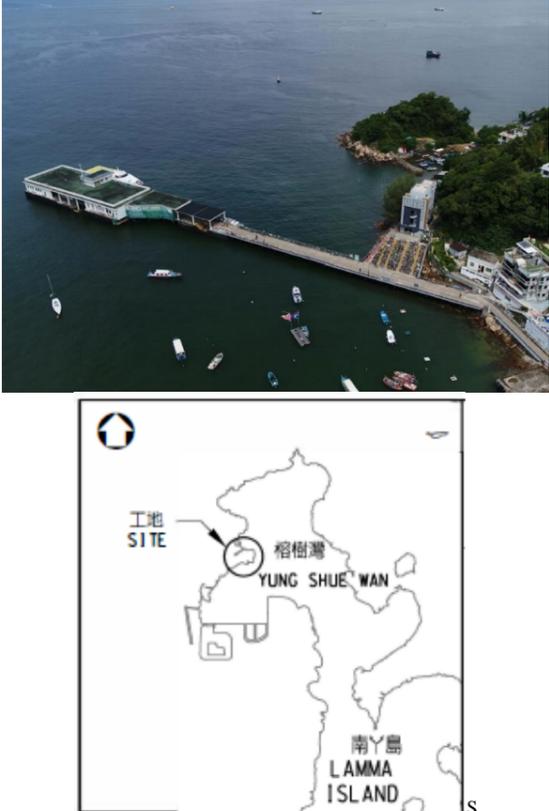
**(2) Community Facilities Works**

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
5049C G A	The District Cooling System for Tung Chung New Town Extension (East)	3,918.2	EEB EMSD	6/2021	2030 Q1 (Tentative)	The scope of the district cooling system for Tung Chung New Town Extension (East) comprises district cooling system plant building, seawater culvert/pipes, chilled water distribution pipes and connection facilities at user buildings.	

**(3) Port and Reclamation Works**

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
799CL A	Tung Chung New Town Extension – Detailed Design and Site Investigation	729.5	SDEV CEDD	6/2016	2027 Q2	<p>Tung Chung New Town Extension (TCNTE) covers areas on the eastern and western flanks of the existing Tung Chung New Town. Upon full development, TCNTE will provide about 64 800 public/private housing units and about 877 000 square meters of commercial floor space, accommodating a population of about 182 000.</p> <p>The reclamation and advance works substantially completed in January 2023 and parcels of land were handed over to Housing Department for public housing development.</p> <p>The first phase of site formation and infrastructure works commenced starting from May 2021.</p> <p>Second phase works commenced in April 2025 and is in progress.</p> <p>The detailed design for the remaining phase works is in progress.</p>	 <p align="center">Tung Chung East Extension Area</p>  <p align="center">Tung Chung West Extension Area</p>
859CL A	Tung Chung New Town Extension – Site formation and Infrastructure Works	19,332.9		5/2021	Target for completion in about 7 years with phased completion from 2024 onwards		
898CL A	Tung Chung New Town Extension – Site Formation and Infrastructure Works – (Second Phase)	4,758.1		4/2025	End 2030		
786CL -2D B-	Tung Chung New Town Extension – Site Formation and Infrastructure Works (Remaining Phase)	Under review		Under review	Under review		

### (3) Port and Reclamation Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
5054TF A	Reconstruction of Yi O Pier	128.5	SDEV CEDD	8/2022	7/2025	The works include construction of a new pier at Yi O with a floating platform and ancillary facilities such as roof cover, lighting system, benches, solar panels, Wi-Fi device.	
5055TF A	Reconstruction of Yung Shue Wan Public Pier	157.4	SDEV CEDD	12/2022	Second half of 2026	The works include demolition of the existing Yung Shue Wan Public Pier, and reconstruction of the pier with a floating platform and ancillary facilities such as roof cover, lighting system, benches, solar panels, Wi-Fi device and drinking facility.	

**(3) Port and Reclamation Works**

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
5060TF A	Reconstruction of Ma Wan Chung Pier	45.8	SDEV CEDD	8/2022	11/2025	The works include demolition of the existing Ma Wan Chung Pier, and re-construction of the pier with a floating platform and ancillary facilities such as roof cover, lighting system, benches, solar panels, Wi-Fi device.	

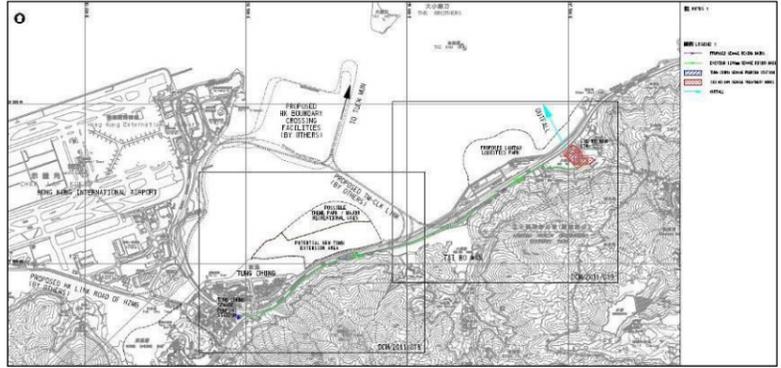
(4) Road Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
5782CL A	Engineering Study on Road P1 (Tai Ho – Sunny Bay Section)	130.2	SDEV CEDD	6/2021	2026 Q3 (anticipated)	<p>The scope of study comprises:</p> <p>(a) an investigation study<sup>1</sup> and the preliminary design for the works relating to the Road P1 (Tai Ho – Sunny Bay Section) that mainly consists of the following works components –</p> <p>(i) a carriageway of approximately 9.5 km long that extends from the Tai Ho Interchange to Sunny Bay and connects to the North Lantau Highway (NLH) and the proposed Route 11, which involves viaduct(s), tunnel(s) and reclamation works; and</p> <p>(ii) the associated building, civil, structural, marine, electrical and mechanical, landscaping<sup>2</sup>, and environmental protection and mitigation works; and</p> <p>(b) the associated site investigation works and works supervision.</p>	

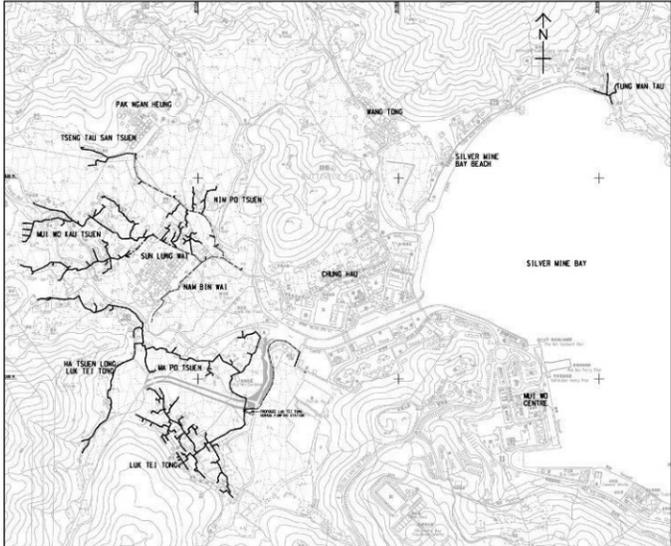
<sup>1</sup> The investigation study includes a review of the findings of previous studies, and impact assessments on environment, traffic, geotechnical, marine, heritage and other related aspects.

<sup>2</sup> The investigation study covers the consideration of building cycle tracks and promenades along appropriate road section(s).

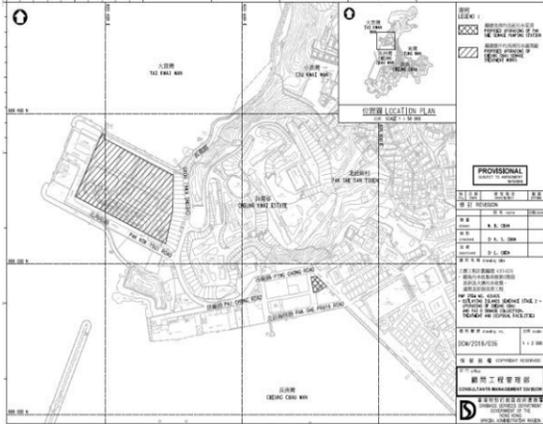
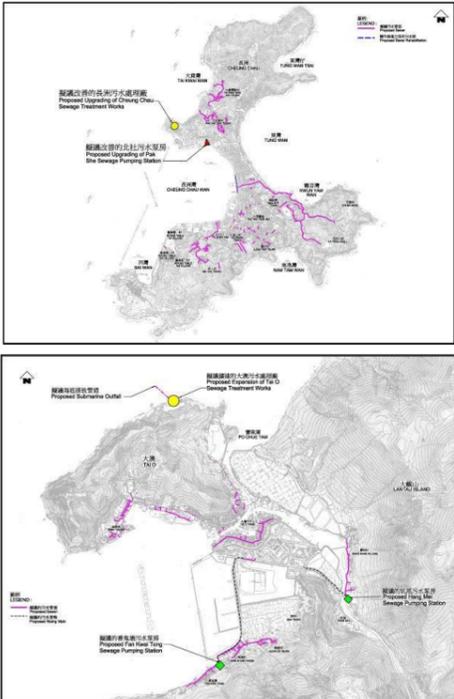
**(5) Drainage Works**

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
381DS	Construction of additional sewage rising mains and rehabilitation of the existing sewage rising main between Tung Chung and Siu Ho Wan	1,362.6	SEE  DSD	Phase 1 8/2016  Phase 2 4/2022	Phase 1 4/2022  Phase 2 10/2025	<p>The project comprises the construction of additional sewage rising mains, rehabilitation of the existing sewage rising main and modification of related facilities between Tung Chung and Siu Ho Wan.</p> <p>Phase 1 (construction of additional rising mains) were completed in April 2022.</p> <p>Phase 2 works (rehabilitation of existing rising main) were completed in October 2025.</p>	

(5) Drainage Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
343DS	Outlying Islands sewerage stage 2 – Peng Chau village sewerage phase 2 remaining works	Under Review	SEE DSD	Under Review	Under Review	<p>The project aims at providing a public sewage collection system for the unsewered areas in Peng Chau in order to improve the water quality of nearby watercourses and the hygiene condition of five unsewered areas (Shan Ting Tsuen, Tai Lung Tsuen, Wai Tsai Tsuen, Tai Yat San Tsuen (remaining part) and Tung Wan Village (remaining part)).</p> <p>Detailed design of the project is in progress.</p>	
353DS	Outlying Islands sewerage stage 2 – extension of sewerage system to other unsewered villages in Mui Wo	135.7	SEE DSD	11/2021	2026 Q2	<p>The scope of works mainly comprises the construction of sewers for Luk Tei Tong and Ma Po Tsuen, and one sewage pumping station with associated twin rising mains at Luk Tei Tong.</p> <p>Construction works commenced in November 2021 for completion in 2026 Q2 tentatively.</p>	

(5) Drainage Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
437DS	Outlying Islands sewerage stage 2 – upgrading of Cheung Chau sewage treatment and disposal facilities	2,606.9	SEE DSD	11/2020	2026 Q1	<p>The project mainly comprises upgrading the sewage treatment facilities at the existing Cheung Chau sewage treatment works and the Pak She sewage pumping station.</p> <p>Construction works commenced in November 2020 for completion in 2026 Q1 tentatively.</p>	
354DS	Outlying Islands sewerage stage 2 – upgrading of Tai O sewage disposal and treatment facilities and provision of sewage collection facilities for Tai O and Cheung Chau	Under Review	SEE DSD	Under Review	Under Review	<p>The project mainly comprises the provision of public sewerage for the unsewered areas in Cheung Chau and Tai O, and upgrading the sewage treatment facilities at the existing Tai O sewage treatment works.</p>	



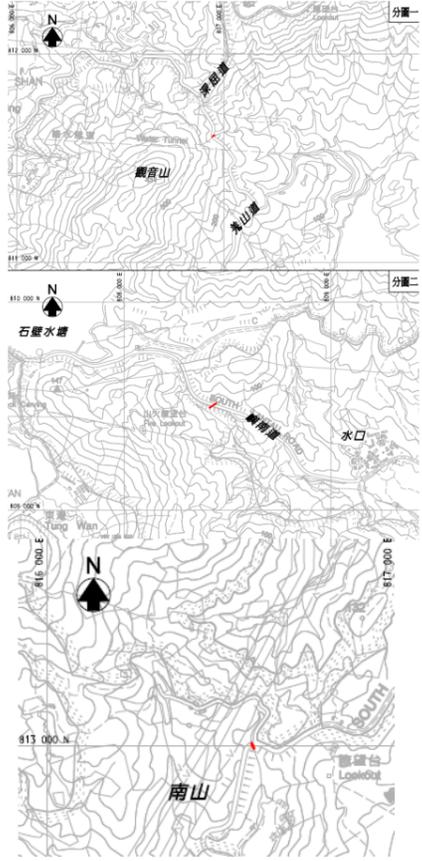
(5) Drainage Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
433DS	Construction of San Shek Wan Sewage Treatment Works and Pui O village sewerage	1,688.8	SEE DSD	3/2021	2026 Q3	<p>The project aims at providing public sewerage at South Lantau. It mainly comprises the construction of a secondary sewage treatment works at San Shek Wan with associated submarine outfall, trunk sewer from Pui O to San Shek Wan, village sewers at Lo Uk and a sewage pumping station at Pui O</p> <p>Construction works commenced in March 2021 for completion in 2026 Q3 tentatively.</p>	
331DS	Outlying Islands sewerage stage 2 – South Lantau sewerage works – remaining works	Under Review	SEE DSD	2027 Q3 (Tentative)	2032 Q3 (Tentative)	<p>The project aims at providing public sewerage at South Lantau. It mainly comprises the construction of trunk sewers along the South Lantau Road and village sewers at Shui Hau, Tong Fuk, Cheung Sha, San Shek Wan, Pui O and Ham Tin.</p> <p>Detailed design is in progress.</p>	

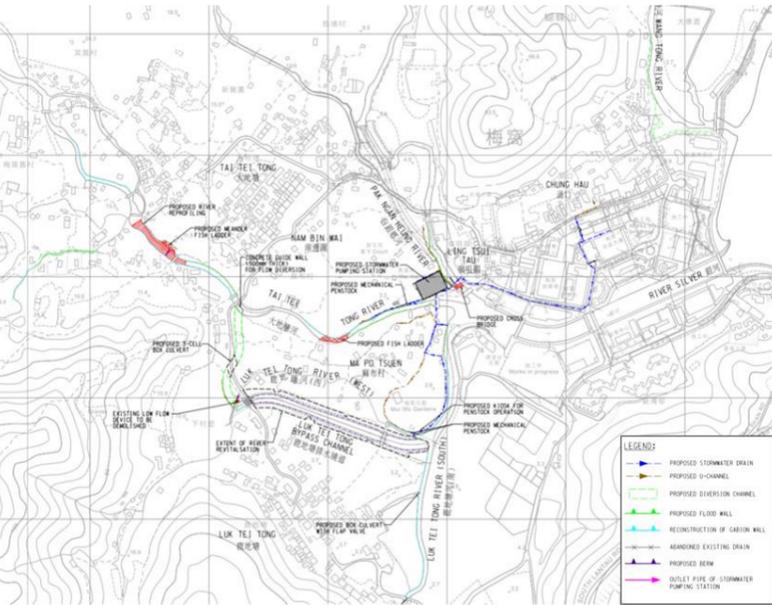
**(5) Drainage Works**

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
415DS	Cheung Chau Development, improvement to existing roads and drains in Cheung Chau old town - remaining engineering works	Under Review	SEE DSD	Under Review	Under Review	The scope of the Project mainly comprises the construction of sewers for four unsewered areas in Cheung Chau Old Town, namely Lung Tsai Tsuen, Ko Shan Tsuen, Tai Tsoi Yuen Kui and Pak She San Tsuen.	

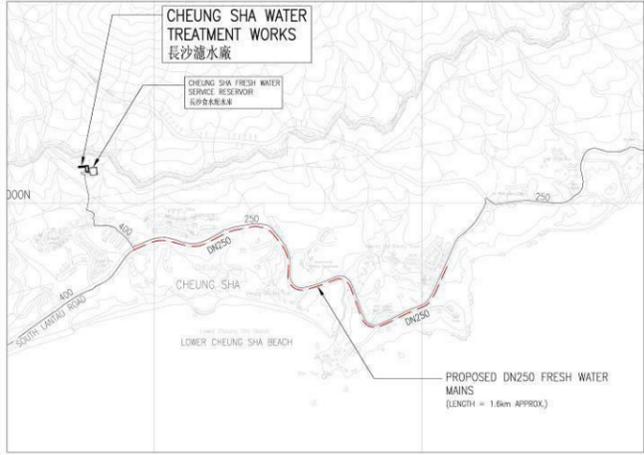
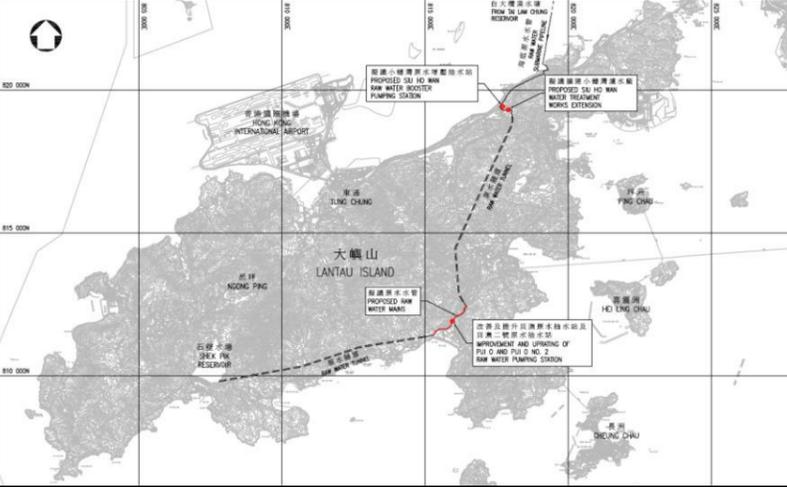
(5) Drainage Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
172CD	Rehabilitation of underground stormwater drains – remaining works	702.7 (3.0 for Islands District)	SDEV DSD	6/2021	12/2025	<p>Remaining Works include rehabilitation of about 19 km of stormwater drains in Central &amp; Western, Wan Chai, Eastern, Southern, Islands, Tuen Mun, Yuen Long, North, Tai Po, Sha Tin, Kwun Tong and Sai Kung districts.</p> <p>Among them, the proposed works in Islands District comprise rehabilitation of about 100m stormwater drains.</p> <p>Construction works were substantially completed in December 2025.</p>	 <p>— Proposed stormwater drains to be rehabilitated</p>

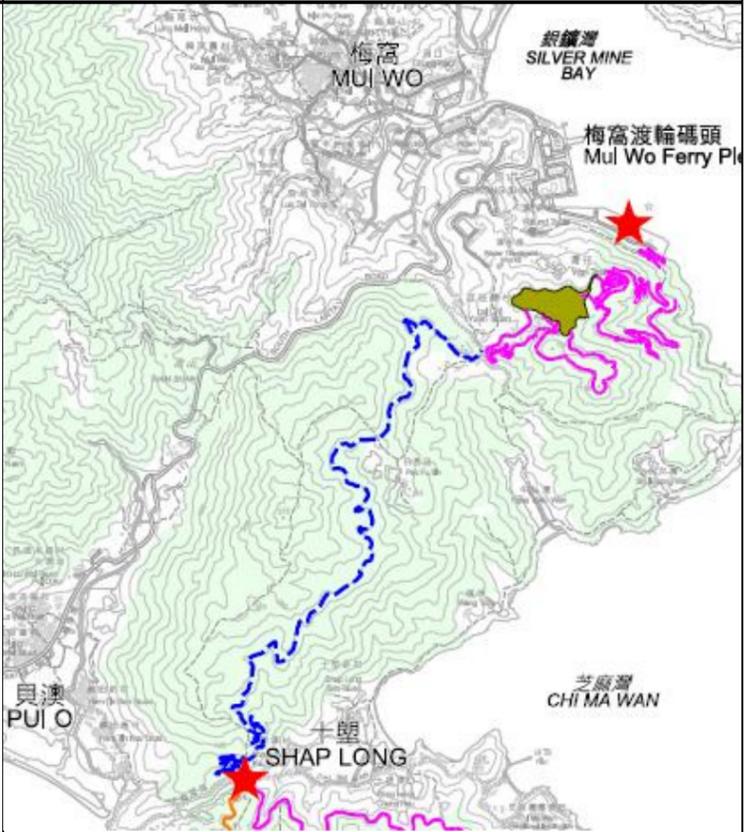
(5) Drainage Works

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
414DS	Rehabilitation of underground sewers – remaining works	306.4 (2.0 for Islands District)	SEE DSD	9/2023	2027 Q3	<p>Remaining Works include rehabilitation of about 6 km of underground sewers in Central &amp; Western, Wan Chai, Eastern, Southern, Islands, Tuen Mun, Yuen Long, North, Tai Po, Sha Tin, Kwun Tong and Sai Kung districts.</p> <p>Among them, the proposed works in Islands District comprise rehabilitation of about 40m sewers.</p> <p>Construction works commenced in September 2023 for completion in 2027 Q3 tentatively.</p>	
189CD	Drainage improvement works in Mui Wo	Under Review	SDEV DSD	2028 Q2 (Tentative)	2032 Q4 (Tentative)	<p>The proposed works of the project comprise:</p> <p>(a) Drainage improvement works in Tai Tei Tong River, Luk Tei Tong River, Luk Tei Tong Bypass Channel, Wang Tong River, Nam Bin Wai and associated drainage works; and</p> <p>(b) Revitalisation of Luk Tei Tong Bypass Channel.</p> <p>Detailed design of the project is in progress.</p>	

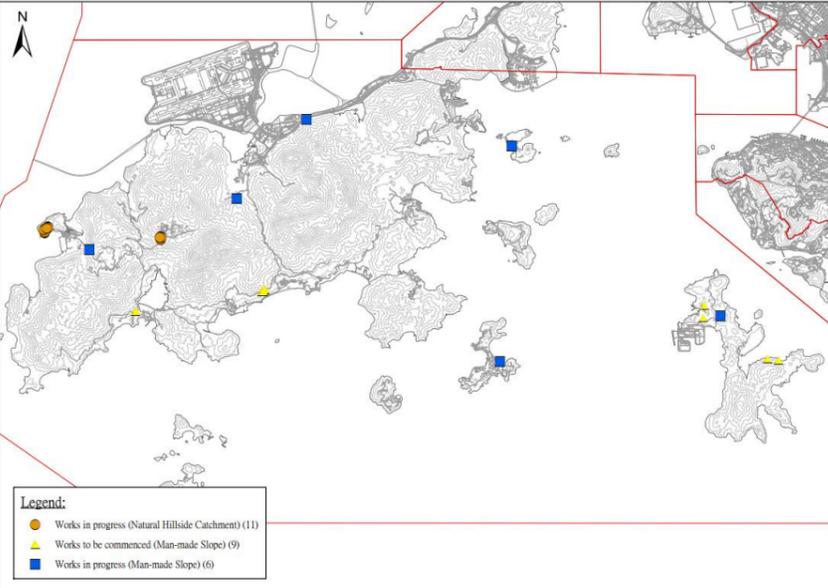
**(6) Water Works**

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
9100WX D	Uprating of Cheung Sha Water Treatment Works	19.3  (main works)  15.0 (associated mainlaying works)	SDEV  WSD	8/2020  (main works)  2026 Q2 (associated mainlaying works)	2023 Q1  (main works)  2029 Q2 (associated mainlaying works)	<p>The project comprises uprating of Cheung Sha water treatment works from its nominal output of 6,000 cu.m. to 7,500 cu.m per day. The works will involve addition, modification and/or retrofitting of water treatment units, and associated civil, structural, geotechnical, mechanical and electrical works within the existing WSD's Land Allocation for Cheung Sha Water Treatment Works.</p> <p>The programme of the proposed mainlaying works was revised to suit the latest planned development.</p>	
373WF A	Siu Ho Wan Water Treatment Works Extension – Main Works	3,694.9	SDEV  WSD	2022 Q1	2027 Q4	<p>The project comprises expansion of the Siu Ho Wan Water Treatment Works to increase its water treatment capacity from 150,000 m3 per day to 300,000 m3 per day, and increase correspondingly in the transfer capacity of the associated raw water supply systems.</p> <p>The investigation study, design and associated site investigation works for the project commenced in August 2018.</p> <p>Construction works was commenced in March 2022 for completion in 2027 Q4.</p>	

(7) Others

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organization	Commencement Date (M/Yr)	Completion Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
5101CX D	Expansion of Mountain Bike Trail Networks (Remaining Phase) and Other Minor Improvement Works in South Lantau - Design and Construction	15.16 (Main Works)  37.81 (Minor Improvement Works)	SDEV  CEDD	10/2024  (Main Works)  11/2021  (Minor Improvement Works)	9/2026  (Main Works)  10/2023  (Minor Improvement Works)	<p>The project comprises:</p> <ul style="list-style-type: none"> <li>(a) new mountain bike trails connecting Mui Wo and Pui O as well as associated supporting facilities;</li> <li>(b) removal of an illegal concrete structure at a section of natural stream in Pui O Au to restore the natural environment; and</li> <li>(c) reinstate the retaining wall and footpath outside the Silvermine Bay Beach Resort.</li> </ul> <p>The main works of the mountain bike trail networks expansion (remaining phase) commenced in October 2024. The works is in progress.</p> <p>The restoration works at Pui O Au commenced in November 2021 and was completed in February 2022.</p> <p>The reconstruction works of retaining wall and footpath outside Silvermine Bay Beach Resort were carried out in two phases. The first phase of the reconstruction works commenced in December 2021 and was completed in September 2022. The second phase of the reconstruction works commenced in December 2022 and was completed in October 2023.</p>	

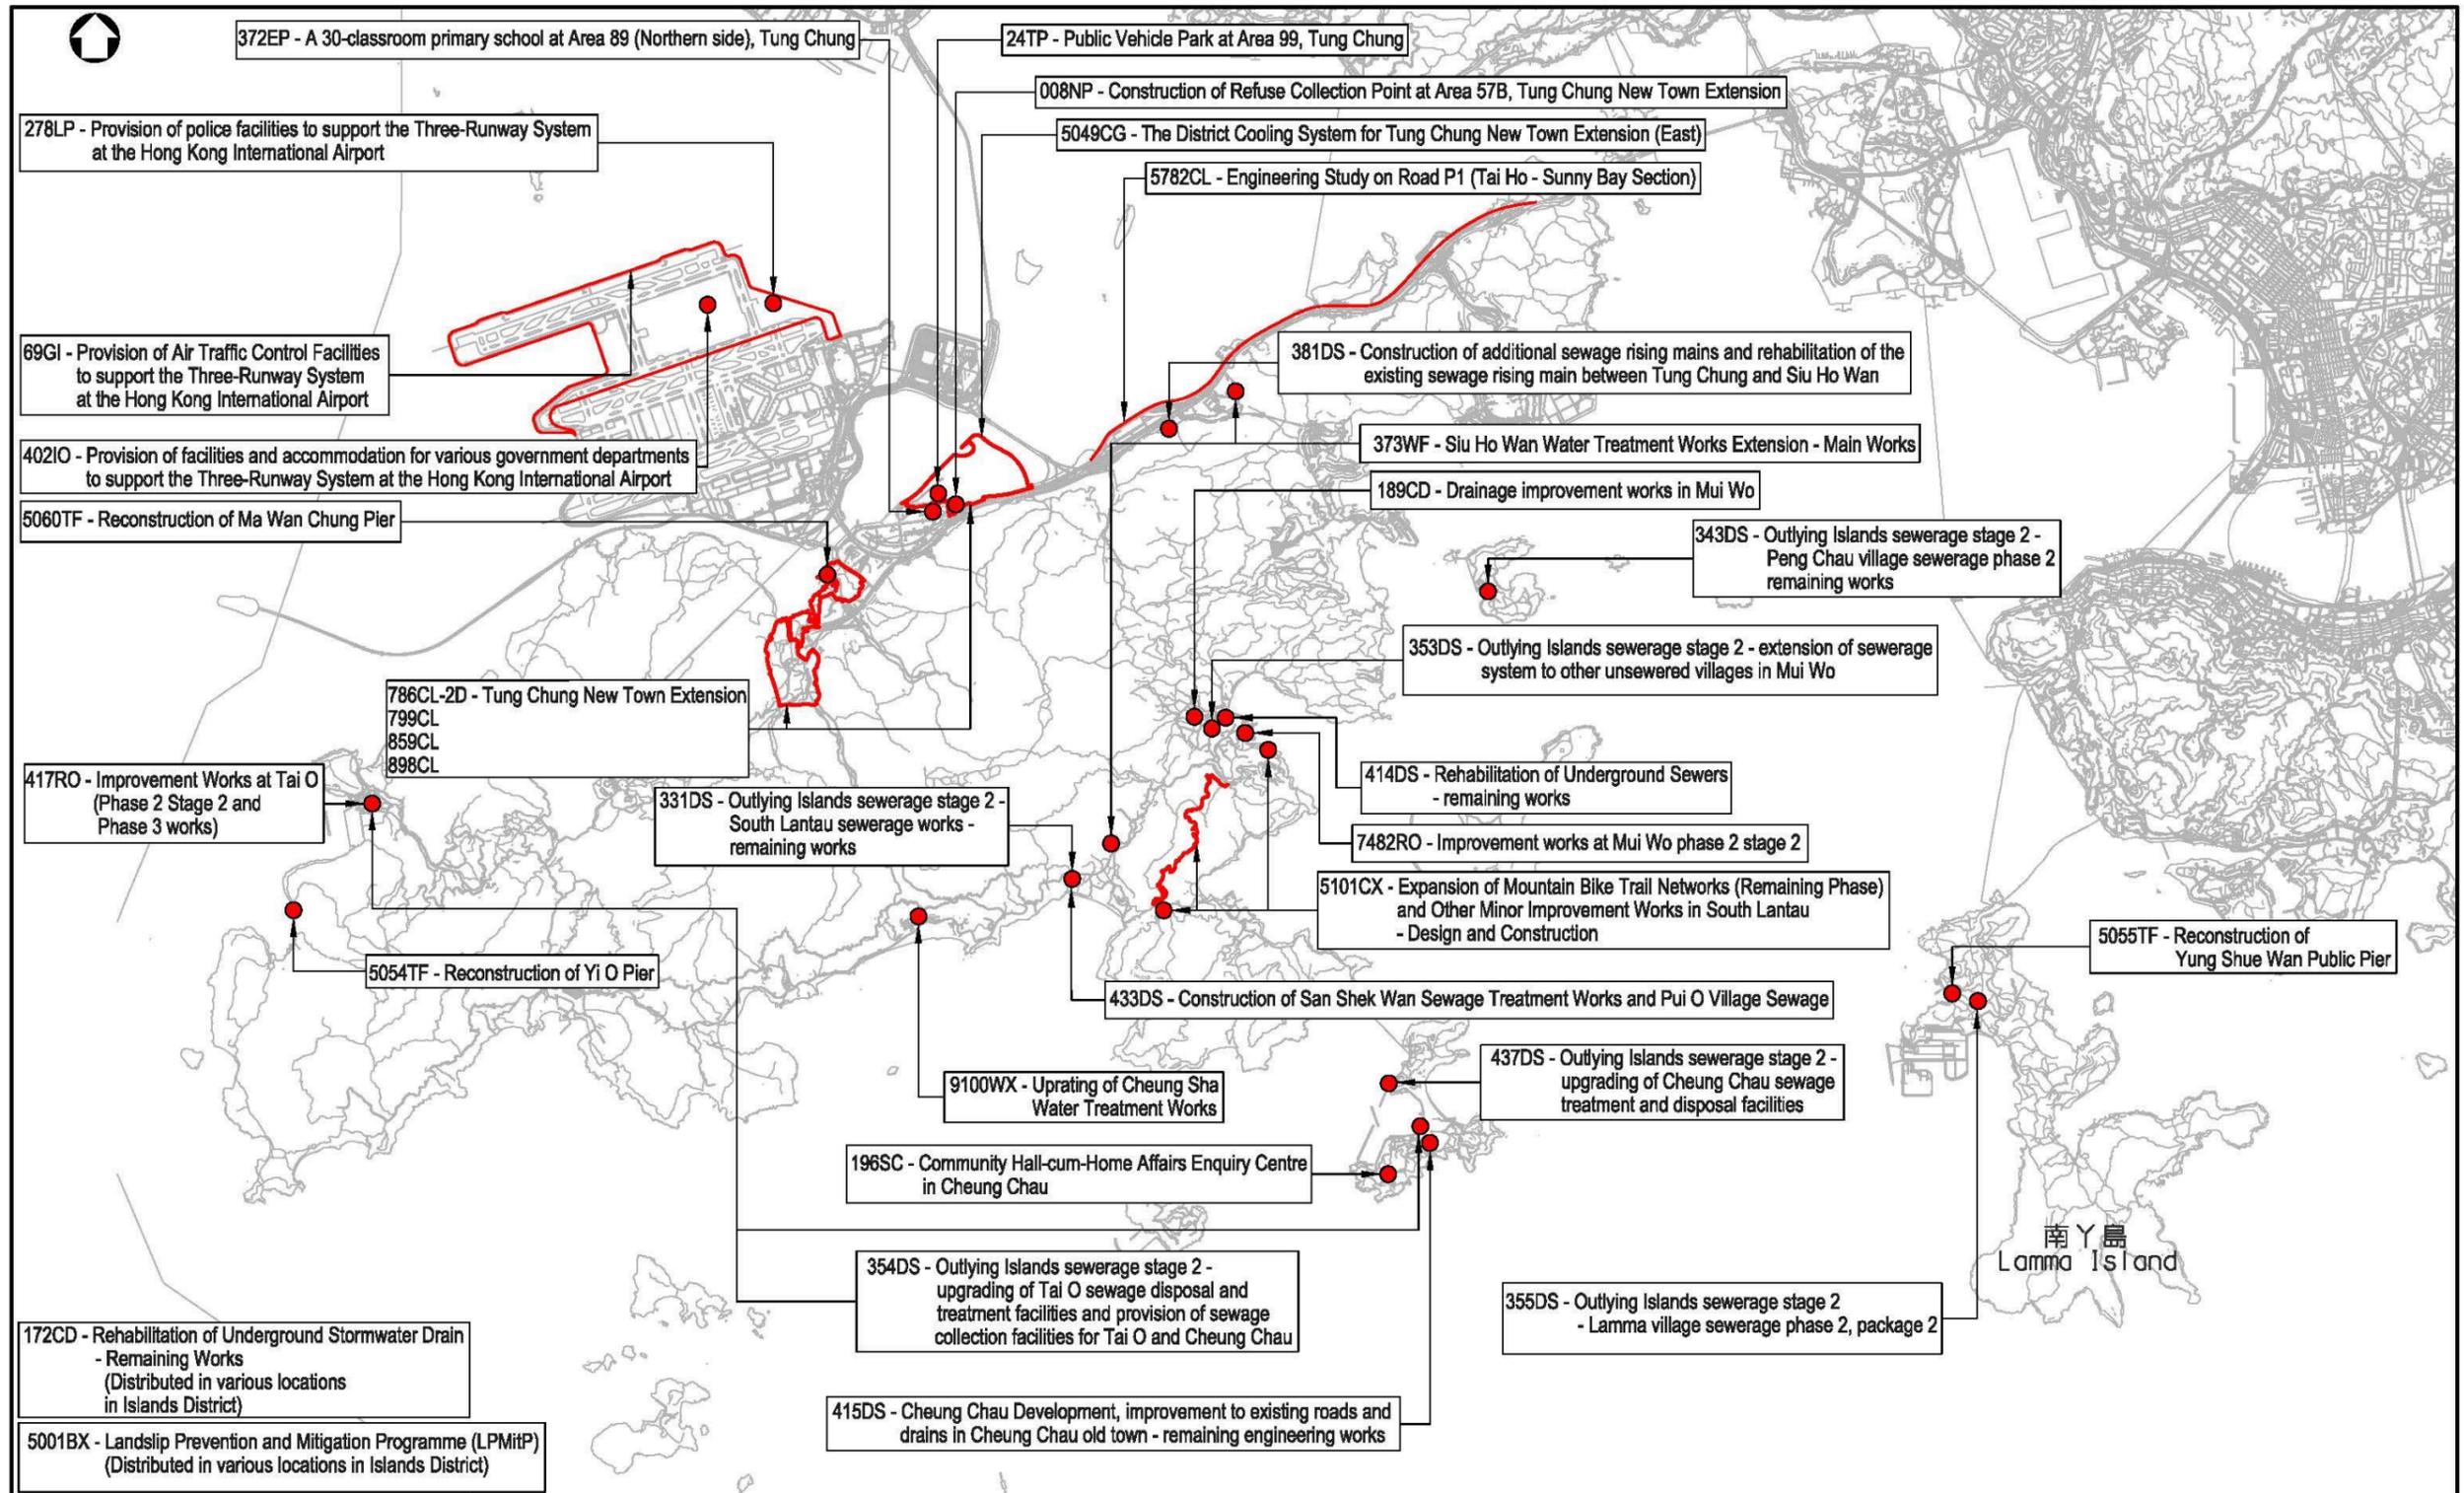
(7) Others

Item No & Cat.	Title	Estimated Cost (\$M)	Head of Bureau & responsible Dept/ Organizatio	Commencemen t Date (M/Yr)	Completi on Date (M/Yr)	Scope of Works/ Notes	Photo/Drawing
5001BX  D	Landslip Prevention and Mitigation Programme (LPMitP)	1,050.00  (Estimated expenditure for Financial Year 2024/25)	SDEV  CEDD	2010	On-going	<p>Landslip Prevention and Mitigation (LPMit) works for 243 man-made slopes and 161 natural hillside catchments in Islands District were completed.</p> <p>The LPMit works for 11 man-made slopes in Islands District are in progress.</p> <p>The details of man-made slopes are:</p> <ul style="list-style-type: none"> <li>➤ 1 Slope No. 10SW-B/C1 at Behind Nos.1,3,5 &amp; 7, Shing Ka Road, Peng Chau</li> <li>➤ 1 Slope No. 10SW-C/C6 at Southeast Of Slivermine Bay Treatment Works</li> <li>➤ 1 Slope No. 10SW-D/C5 at Northwest Of Hei Ling Chau Correctional Institution</li> <li>➤ 1 Slope No. 10SW-D/C53 at Southeast Of Hei Ling Chau Addiction Treatment Centre</li> <li>➤ 1 Slope No. 9SW-D/C101 at Sham Wat Road, Is</li> <li>➤ 1 Slope No. 13NE-A/C74 at South Lantau Road</li> <li>➤ 1 Slope No. 13NE-B/CR153 at Lantau Island Catchwater Section F11Sw-C/Hpsa1</li> <li>➤ 1 Slope No. 13NW-B/C387 at No. 8 San Fung Tsuen, Lower Keung Shan, Lantau</li> <li>➤ 1 Slope No. 14NE-B/C11 at Behind House Nos. 17,18, Yung Shue Long New Village, Lamma Island</li> <li>➤ 1 Slope No. 15NW-C/C7 at Southwest Of Lamp Post No. 35027 On The Path From Sok Kwu Wan To Mo Tat Wan, Lamma Island.</li> <li>➤ 1 Slope No. 15NW-C/C44 at West Of Lampost No. 35035, On The Sok Kwu Wan To Mo Tat Wan Path, Lamma Island</li> </ul>	

**(7) Others**

						The Civil Engineering and Development Department also plans to carry out LPMit works on 25 man-slopes and 6 natural hillside in Islands District in the coming year, which are expected to be completed in the third quarter of 2029.	
--	--	--	--	--	--	---	--

# (8) Appendix



圖則名稱 drawing title	項目編號 item no.	辦事處 office
Progress Report of Major Projects in Islands District 2026 - Projects Location Plan	比例 scale 1 : 100 000	南拓展及可持續大嶼辦事處 SOUTH DEVELOPMENT AND SUSTAINABLE LANTAU OFFICE
	圖則編號 drawing no. SSLLAN0035	 土木工程拓展署 CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT